

CCS ASSEMBLY INSTRUCTIONS

BY SIMPLY FOLLOWING THESE STEP-BY-STEP INSTRUCTIONS, YOU WILL SOON BE ENJOYING YOUR NEW DRAPERY HARDWARE.

CCS ASSEMBLY


Materials Needed:

- CCS Track 511**-25
- Cord 009004-25
- CCS End Pulley 052801-25
- CCS End Pulley (Short)* 052802-25
- CCS Cord Connector 052510-25
- CCS Overlap Master 052508-25
- CCS Underlap Master 052509-25
- Klick Carrier 052008-25

* For use with one-way draw systems

** Components (except cord and connectors) also available in brown (color code 65 instead of 25)

- Determining track cut length: For center draw, subtract 3.25" from total length of track. For one-way draw systems using white track, subtract 2.25". For one-way draw systems using brown track, subtract 2.625". (This allows for the length of the pulleys)
 - Determining amount of cord needed: The total length of the track plus the length of the cord drop, then multiplied by two. Add eight inches for adjustability and cord shrinkage. Cut the nylon cord by heating with a lighter to prevent fraying.
1. Push both ends of the cord through the outside end of the first end pulley and slide both cords through the track. Fix first pulley onto the track. This will be the "drop side" of the track. On the other end of the track; pull excess cord until about six inches hangs out of each channel.
 2. When looking at the end of the track, you will see two cords coming out of the channel; we will refer to these as the right and left side.
 3. Attach cord connector #1 to the very end of the cord hanging out of the right channel and remove these screws. Note: Use a #1 Phillips screwdriver or drill bit in good condition to avoid marring the head of the screw. Pull the cord through about 4 inches toward you.
 4. Pull the cord hanging out of the left channel through the inside left of the 2nd end pulley and loop the cord back through the right side. This makes a continuous loop with the cord.
 5. Attach cord connector #2 to this end of the cord. Slide the connector about 4 inches away from this end of the cord to allow for adjustability. Remove these screws.
 6. Fix the cord connector #3 to the left side of the cord between the hanging end pulley and the track. Do not tighten or remove these screws yet.

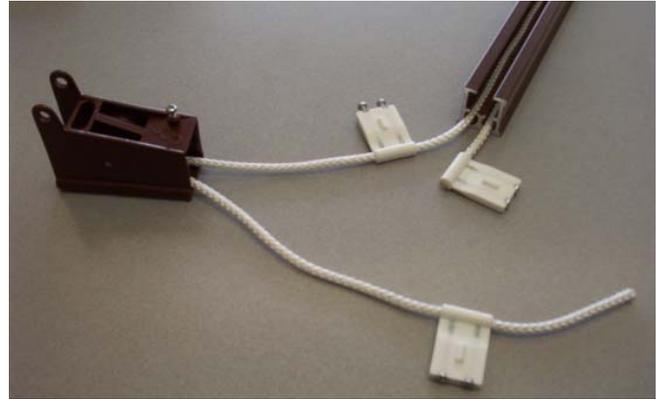

Cord Connector placement (ignore the tightened screws)

7. The order in which you add the master carriers to the track will determine which side your cord hangs from. For a cord drop on the right side of the track, slide the overlap master carrier on first with cord connectors #1 and #2 sliding into the cord channels. Push the 4 inch cord ends up through the hole in the center of the master so that they extend above the track. Tie them together using a basic square knot. Then slide the underlap master onto the track with connector #3 sliding into the channel. For a cord drop on the left, slide the underlap master on first and then the overlap.
8. Attach the last end pulley onto the track.
9. On this end pulley, ensure the cord loop is not wrapped around the metal pin inside the end pulley.
10. Pull the cord on the drop side so that the master carriers are in the open position against each end pulley. You may need to push one in place with your hand. With both masters in this position, tighten the screws on cord connector # 3. Now the master carriers are centered.
11. By pulling the cord through the big gap of the end pulley on the drop side, it will hang straight behind the curtain and is ready to operate.
12. At this point, carriers may be "klicked" into the track.

One-Way Draw Systems

1. Follow steps 1-3.
2. Follow steps 4 and 5 using a short end pulley.
3. Slide an underlap master carrier onto the track with both cord connectors sliding into the channel. The arm should point back towards the short end pulley. For a one-way right, reverse the arm. For both one way right and left, shift the master arm down one position so that the arm will completely overlap the short end pulley.
4. Attach the short end pulley onto the track. Tighten the screw.
5. Follow step 9.
6. Follow steps 11 and 12.

CCS INSTALL INSTRUCTIONS

BY SIMPLY FOLLOWING THESE STEP-BY-STEP INSTRUCTIONS, YOU WILL SOON BE ENJOYING YOUR NEW DRAPERY HARDWARE.

Getting Started:

Please read through all instructions carefully before you begin.

Unpack all materials making sure all components are included:

- Track(s)
- Master carrier(s) & carriers (pre-installed within track)
- Mounting brackets
- Splice, if requested

Tools You Will Need:

- Drill with a 1/8" bit and a Phillips bit
- Phillips screwdriver
- Metal tape measure
- Hack saw (optional)

Wall Mount Instructions:

Installing Your Drapery Track:


You are now ready to install your Forest Drapery Track System.

1. Measure

Determine the height of the top of track and mark bracket height on the wall for all the brackets and adjust (as necessary) to make sure they are all leveled.


2. Mark

Measure the width of the track and mark the two end brackets approximately 3" - 4" in from the ends of the track. Evenly space the remaining brackets and place corresponding marks.

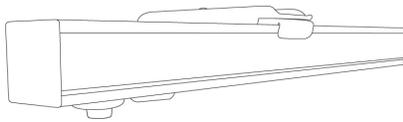


3. Mount

To attach the bracket to the wall; first pre-drill holes for screw diameter when mounting into wood frame of window or wall stud. Otherwise, pre-drill and install anchors first before fastening with screws.




4. Attach Bracket

Place the track into the bracket as shown in the drawing; applying pressure until track "clicks" into bracket. Make sure track set screw is loose enough to allow the track retainer to flex. Repeat this step for the remaining brackets.

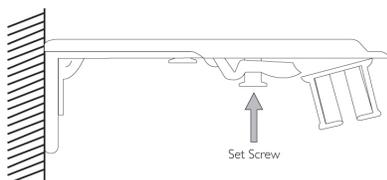


5. Tighten

Tighten track set screws on all the brackets to secure track to brackets.

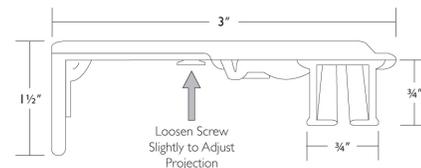

6. Adjust Projection

Adjust track to the desired projection. Projection is adjustable from 3" - 4 1/2". Repeat this step for the remaining brackets.

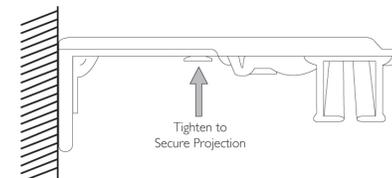


Once desired projection is set for all the brackets, lock the bracket into position by tightening the track depth adjustment set screw (see drawing below).

Installing Splice, if requested:

For wide areas, tracks will be shipped in multiple pieces and will require a splice.

- Slide the track of the connecting ends on each track into the channel of the splice and butt ends together.
- Tighten locking screw with hex key for a secure fit.

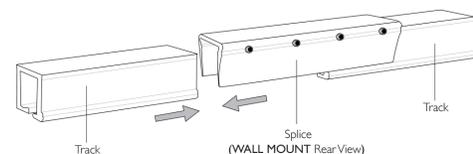

CCS INSTALL INSTRUCTIONS (CONTINUED)

BY SIMPLY FOLLOWING THESE STEP-BY-STEP INSTRUCTIONS, YOU WILL SOON BE ENJOYING YOUR NEW DRAPERY HARDWARE.

Ceiling Mount Instructions:

Installing Your Drapery Track:

You are now ready to install your Forest Drapery Track System.

1. Measure


Measure the width of the track and mark the two end brackets approximately 3" - 4" in from the ends of the track. Evenly space the remaining brackets and place corresponding marks.

2. Mount

To attach the bracket to the ceiling; first pre-drill holes for screw diameter when mounting into wood frame of window or wall stud. Otherwise, pre-drill and install anchors first before fastening with screws.


3. Attach Bracket

Place the track into the bracket as shown in the drawing; applying pressure until track "clicks" into bracket. Make sure track set screw is loose enough to allow the track retainer to flex. Repeat this step for the remaining brackets.



4. Tighten


Tighten track set screws on all the brackets to secure track to brackets.



Installing Splice, if requested:

For wide areas, tracks will be shipped in multiple pieces and will require a splice.

- Slide the track of the connecting ends on each track into the channel of the splice and butt ends together.
- The tracks will snap together. Press together and confirm a tight fit.
- Secure with additional screw.

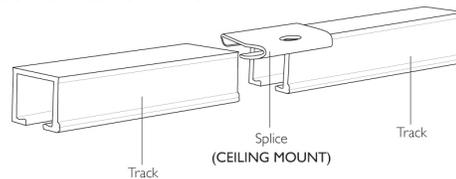

Installing Drapery Baton: (Baton Control Only)

You may attach a baton(s) to the master carrier(s). Simply fit the metal hook on the baton through the slot on the master carrier.



Installing Tension Device: (CCS Cord Control Only)

Consider Position of Tension Device:

The tension device should be positioned on the window frame or the wall so that the tension device and control cord does not interfere with operation / hanging of drapery.

The tension device should be installed so that cord is taut without stretching or pulling down on it. Stretching the cord will cause excessive wear. Do not twist or cross the control cord.

Install Tension Device:

Press and hold the back spring on the tension device that is pre-installed at the top of the cord loop. With the spring held, slide the device down to the bottom of the loop, to where you would like the device positioned.

Insert and secure the two screws through the holes in the device. The loop should now pass freely through the tension device.

Please Note: When attaching to wood, included screws can be screwed directly into wood. When attaching to drywall and metal, use anchors that are designed for such substrates. Visit your local hardware store for guidance on appropriate anchors for your substrate.

