


68002-25 1.8 NM TUBULAR MOTOR PROGRAMMING INSTRUCTIONS

BY SIMPLY FOLLOWING THESE STEP-BY-STEP INSTRUCTIONS, YOU WILL SOON BE ENJOYING YOUR NEW
MOTORIZED WINDOW TREATMENTS.

Powering ON/OFF:

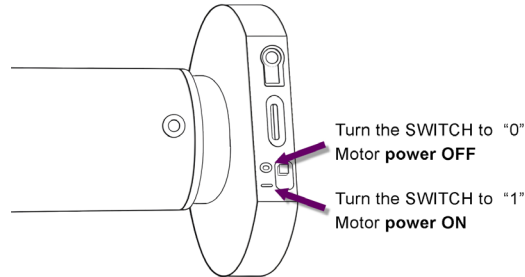


Pairing the Remote:

1. Press the **PROGRAM** button.
The motor will jog.




2. Press the **P2** button.
The motor will jog.

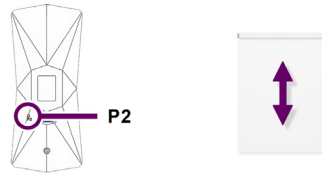

3. Press the **OPEN** button.
The motor will jog.

The remote is now
paired.

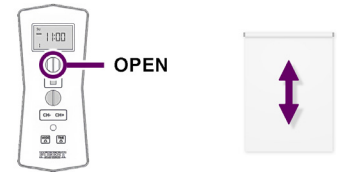

Set the Top Limit:

1. Press the **P2** button.
The motor will jog.




2. Press the **OPEN** button.
The motor will jog.




3. Press the **P2** button.
The motor will jog.



4. Using the **OPEN** button,
adjust the shade to the
desired top limit.

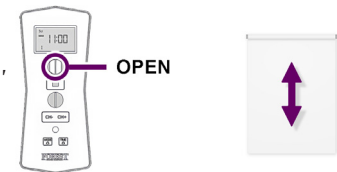

5. Press the **OPEN** button.
The motor will jog.
The top limit is saved.

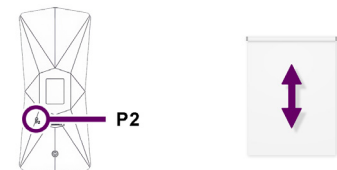


Continue to set the
bottom limit


68002-25 1.8 NM TUBULAR MOTOR PROGRAMMING INSTRUCTIONS Continued

Set the Bottom Limit:


1. Using the **CLOSE** button, adjust the shade to the desired bottom limit.




4. Press the **P2** button.
The motor will jog.




2. Press the **P2** button.
The motor will jog.



5. Press the **P2** button once more.
The motor will jog.
The bottom limit is saved.




3. Press the **CLOSE** button.
The motor will jog.




Set Favorite Position:


1. Using the **OPEN/CLOSE** buttons, adjust the shade to the desired position.




4. Press the **P2** button.
The motor will jog.




2. Press the **P2** button.
The motor will jog.



5. Press the **P2** button once more.
The motor will jog.
The bottom limit is saved.



3. Press the **CLOSE** button.
The motor will jog.



68002-25 1.8 NM TUBULAR MOTOR PROGRAMMING INSTRUCTIONS Continued

Reverse Rotation Direction:

- Using the **PROGRAM** button,
The motor will jog.



- Press the **P2** button.
The motor will jog.




- Press the **CLOSE** button.
The motor will jog.
The rotation is reversed.



Adjusting Speed:

- Press and hold the
PROGRAM button for
5 seconds.
The motor will jog twice.

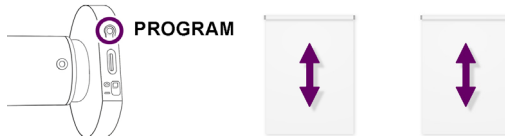

- FOR HIGH SPEED**
Press the **OPEN** button.
The motor will jog.



- FOR REGULAR SPEED**
Press the **STOP** button.
The motor will jog.



- FOR QUIET SPEED**
Press the **CLOSE** button.
The motor will jog.




68002-25 1.8 NM TUBULAR MOTOR PROGRAMMING INSTRUCTIONS Continued

Delete Remote Pairing:

- Using the **PROGRAM** button,
The motor will jog.



- Press the **P2** button.
The motor will jog.

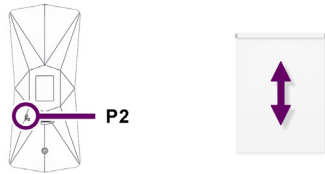


- Press the **STOP** button.
The motor will jog.
The remote is unpaired.




Delete All Settings:

- Press the **P2** button.
The motor will jog.

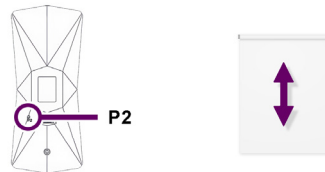

- Press the **P2** button.
The motor will jog.

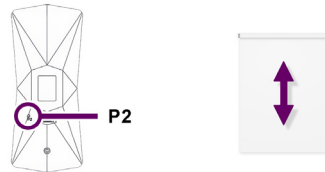

- Press the **CLOSE** button.
The motor will jog twice.
All settings have been deleted.

