


### TECHNICAL SPECIFICATION:


- 12V battery type 27A
- battery life < 3 years
- frequency 433.92MHz
- transmit power max. 10mW
- transmit range indoor max. 30mtr
- working temperature 12°F - 122°F
- each channel can control up to 20 receivers

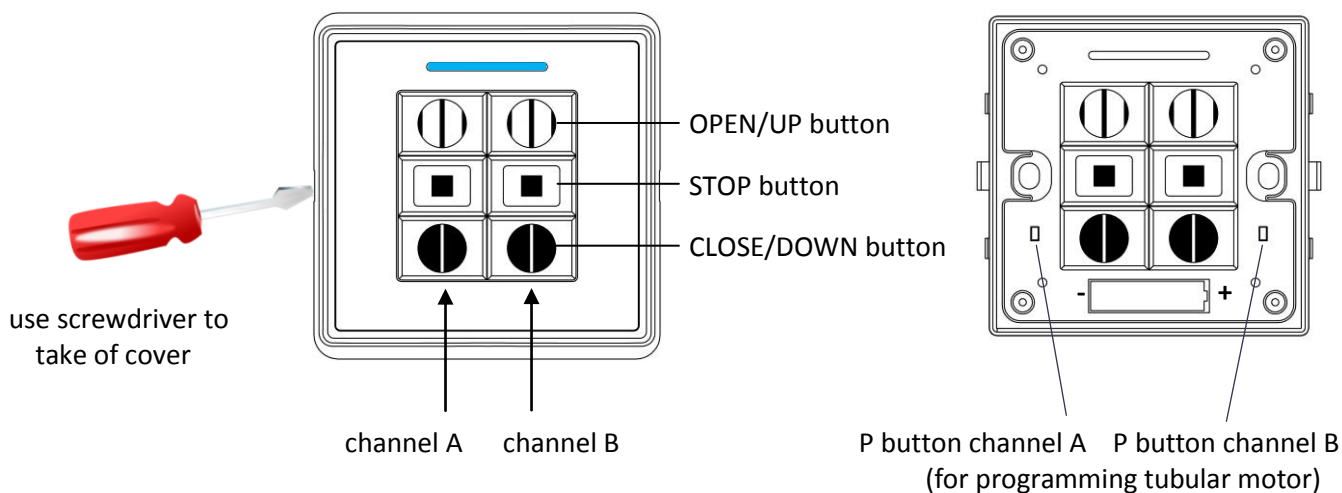

### BATTERY DEAD:

After changing the battery, programmed receivers will stay in the memory of the wall switch. Please follow the local regulations for disposal of the dead batteries.

To program a RF wall switch to a Shuttle S / L:

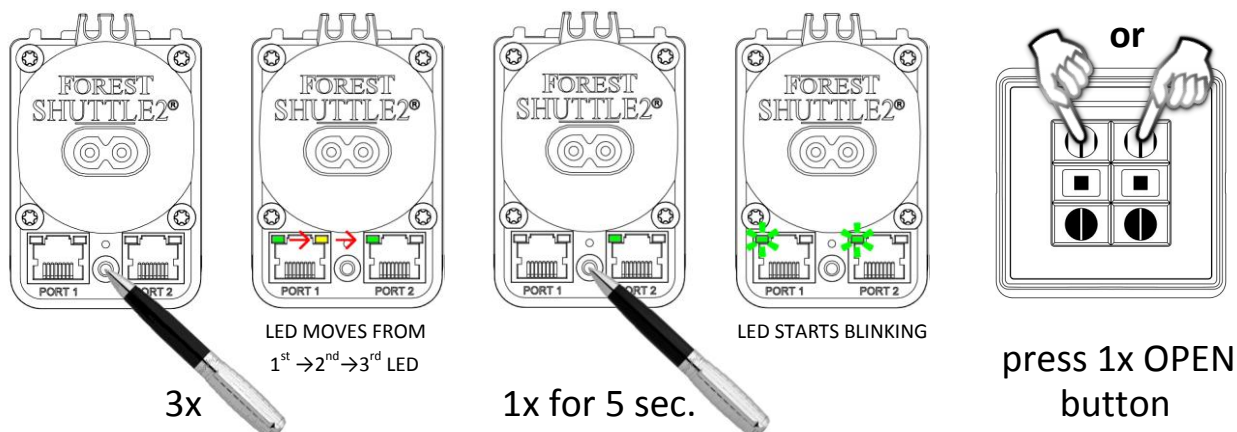

Same procedure, but press CLOSE instead of OPEN, will erase the programmed channel.



Do not mount the motor within 3 feet of other equipment and receivers. This will interfere with the receiver.