



## FOREST LONDON Motorized

1 3/4" motorized wood traversing systems

LONDON 3/4" Motorized Sets  
FOREST SHUTTLE MOTOR Specifications  
FOREST SHUTTLE MOTOR Controls Roadmap

THE WORLD  
BEHIND  
YOUR  
DRAPERIES



# LONDON MOTORIZED TRAVERSING



## 1 3/4" LONDON MOTORIZED

- Forest FMS Track with wood pole fascia.
- Motorize with any Forest Shuttle. See all motor specifications on the following pages. All Forest Shuttle motors include a 10 year warranty.
- Control drapes with a gentle tug, wall switch, remote, any home automation system or by smart phone app. See control options on the following pages.

### ASSEMBLED SYSTEM

Includes assembled track, wood fascia, motor, power supply, single wall brackets, end caps, and Diamond remote, EasyTouch remote or Forest wall switch.

### LONDON COLLECTION FINISHES XX = finish color

#### WOOD POLE & COMPONENTS FINISHES



50  
Oil Rubbed  
Bronze



51  
Antique  
Gold



52  
Burnished  
Gold



53  
Dark  
Pewter



54  
Distressed  
Ivory

#### METAL COMPONENT FINISHES



22  
Polished  
Chrome









23  
Polished  
Brass








29  
Satin  
Nickel
























89  
Graphite

LONDON	COMPONENT
• 	<b>52925-25</b> Shuttle HD (M) <b>52925-59</b> Shuttle HD (M) black <b>52939-25</b> Shuttle Eco (S) See motor specs on pages 99-100
• 	<b>52928-25</b> Power Cord, 7' 6" <b>52934-25</b> Power Cord, 16' includes 24 volt power supply
• 	<b>52926-25</b> Shuttle iOn Includes battery pack. Order charging cable below separately, <b>52924-59</b> . See motor specs on pages 99-100
• 	<b>52924-59</b> Battery Charger Charges battery included with Shuttle iOn motor above, 52926-25.
• 	<b>52949-25</b> Battery Pack Additional battery pack for Shuttle iOn motor
• 	<b>52933-25</b> white <b>59</b> black +10% Forest Wall Switch 2 channel


LONDON	COMPONENT
• 	<b>52931-25D</b> white <b>59D</b> black +10% Diamond Sense Remote RF, 15 channel w/ holder, range 98'
• 	<b>52960-25</b> white <b>59</b> black +10% EasyTouch Remote, 6 channel <b>52961-00</b> Optional clear plastic holder. Must order separately.
• 	<b>52948-25</b> Wi-Fi Dongle For voice and app control over wi-fi. Provides feedback (bi-directional). Use with Shuttles HD and Eco.
• 	<b>52955-25</b> Bond Bridge Pro For voice and app control over RF. Easily pair using the Forest remote. Controls all of your devices in one hub.
• 	<b>52954-25</b> white Sidekick Gen 3 Remote Works with or without Bond Bridge Pro. 1-5 channels.

# LONDON MOTORIZED TRAVERSING

LONDON	COMPONENT
	<b>51323-25 white</b> <b>59 black</b> FMS Track 23' x 10 tracks per bundle bundle = 230'
	<b>1045RSW-5X</b> 1 3/4" Routed Wood Pole, 10'
	<b>1145MOD-5X</b> 1 3/4" London Modern End Cap H: 2" P: 1"
	<b>3045END-XX</b> 1 3/4" Glasgow End Cap Finial H: 2" P: 1 1/8"
	<b>3906-25</b> <b>59 black</b> Track Connector & key 3904-00
	<b>3280-25</b> <b>59 black</b> 3" Single Wall Bracket heavy duty projection 2 1/2"
	<b>3285-25</b> <b>59 black</b> 4" Single Wall Bracket heavy duty, projection 3 1/2"
	<b>3281-25</b> <b>59 black</b> 6" Double Wall Bracket heavy duty projection 1 1/2", 5 1/2"
	<b>32801-25</b> <b>59 black</b> Wall Bracket Cover use with 3280 & 3281
	<b>2114-25</b> 60% fullness 2 5/8" OC <b>2111-25</b> 80% fullness 2 3/8" OC <b>2112-25</b> 100% fullness 2 1/8" OC <b>2115-25</b> 120% fullness 1 7/8" OC <b>59 black</b> Two-Piece Connected Snap Carrier w/ Square Base, use 4 1/4" snap tape.

LONDON	COMPONENT
	<b>52008-25</b> <b>59 black</b> Slim Line Klick Carrier Draperies hang to conceal track
	<b>52009-25</b> Ball Bearing Carrier for motorization
	<b>52508-25</b> Overlap Right <b>52509-25</b> Underlap Left <b>59 black</b> Belt Master Carrier
	<b>52508-25A</b> Overlap Right <b>52509-25A</b> Underlap Left <b>59 black</b> Belt Master Carrier with snaps
	<b>52410-25</b> Butt Right <b>52409-25</b> Butt Left <b>59 black</b> Butt Master Carrier w/ snaps
	<b>2552-25</b> 6" Extension Arm for master Use w/ two one-way draw
	<b>52903-25</b> <b>59 black</b> Forest Shuttle Motor Pulley Connects motor to track
	<b>52909-25</b> Rollease Versa Motor Pulley Connects motor to track
	<b>52910-25</b> <b>59 black</b> Return Pulley
	<b>9012-25</b> Transport Belt Kevlar reinforced
	<b>52512-25</b> white <b>59 black</b> Transport Belt Connector

# LONDON MOTORIZED TRAVERSING

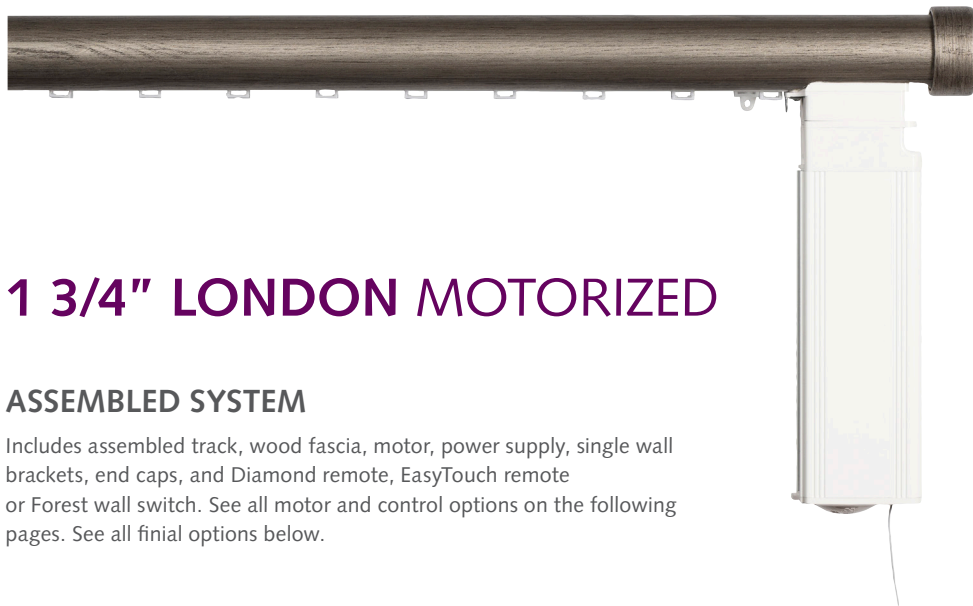

## 1 3/4" LONDON MOTORIZED


### ASSEMBLED SYSTEM

Includes assembled track, wood fascia, motor, power supply, single wall brackets, end caps, and Diamond remote, EasyTouch remote or Forest wall switch. See all motor and control options on the following pages. See all finial options below.


### LONDON COLLECTION FINIALS End caps are included in assembled sets, all others are additional.




**1145MOD-5X**  
1 3/4" Modern End Cap  
H: 2" P: 1"



**1145BEV-5X**  
1 3/4" Bevel Finial  
H: 2 1/4" P: 2"




**1145GRO-5X**  
1 3/4" Grooved Finial  
H: 3 1/4" P: 3 3/4"




**1145OVA-5X**  
1 3/4" Oval Ball Finial  
H: 3 1/2" P: 3 3/8"




**3045END-XX**  
1 3/4" End Cap Finial  
H: 2" P: 1 1/8"



**3045BAL-XX**  
1 3/4" Sphere Finial  
H: 3" P: 4 3/4"



**3045CIL-XX**  
1 3/4" Cylinder Finial  
H: 2 1/4" P: 5 1/8"



**3045PIL-XX**  
1 3/4" Pillbox Finial  
H: 2 3/4" P: 3 1/2"

# SHUTTLE® MOTOR COMPARISON CHART



## SHUTTLE® HD (M)

## SHUTTLE® ECO (S)



VOLTAGE SHUTTLE	24V DC	24V DC
RECEIVER	Internal, optional	Internal
POWER SUPPLY	External, 100-240V AC - 1.5A, 50-60Hz; Output 24V DC - 2.7A	External, 100-240V AC - 0.8A, 50-60Hz; Output 24V DC - 2.5A
MAX POWER	65W	40W
TORQUE	1.5 Nm	1.0 Nm
TRAVEL SPEED	5.5" per second standard 7" per second maximum	5.5" per second standard 7" per second maximum
NOISE LEVEL	< 40 dB(A)	< 40 dB(A)
MAXIMUM WEIGHT	160 lbs per motor 120 lbs per motor - curved track	100 lbs per motor 90 lbs per motor - curved track
DIMENSIONS	2.76" x 1.97" x 9.5"	2.76" x 1.97" x 7.5"
CERTIFICATIONS/MARKINGS	CE/FCC/DOE	CE/FCC/DOE
COLOR OPTIONS	White / Black	White
TOUCH CONTROL TECHNOLOGY	√	√
INTEGRATED EMERGENCY CONTROL	√	√
RF COMMUNICATION STANDARD	√	√
Z-WAVE COMMUNICATION	-	-
AUTOMATION SYSTEM COMPATIBLE	√ using RS485 & dry contacts	√ using RS485 & dry contacts
WI-FI COMPATIBLE	√	√
WORKS WITH DS-XL LED DIMMER	√	√
WORKS WITH WIRELESS CONNECTOR	√	√
CAN BE USED WITH CURVED TRACK	√	√
PLUG & PLAY	√	√
WARRANTY	10 Years	10 Years

# SHUTTLE® MOTOR COMPARISON CHART



SMART HOME  
READY



APP  
CONTROL



WIRELESS  
REMOTE



TOUCH  
CONTROL

## SHUTTLE® iOn




Our wide variety of control options make finding a fit for your windows easy – controlling the drapes by hand, wall switch, remote or even by home automation system.



### TOUCH CONTROL

Open or close your drapes with a gentle tug.

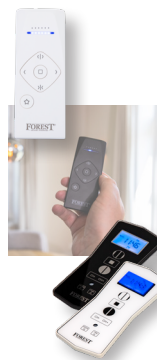

### FOREST REMOTE CONTROLS

We offer two types of RF remote controls: the EasyTouch and the Diamond Sense.

- The EasyTouch controls up to 6 systems, with the option to deactivate unused channels.
- The Diamond Sense is a 15- or 2-channel remote with an LED display. Systems can be operated manually or with the integrated timer.

Both remotes have a range of up to 98 feet.



### BOND BRIDGE PRO

With the Bond Bridge Pro, easily pair your Forest remote and get app control for Forest motorized window coverings and other devices all in one place.



### SIDEKICK GEN 3 REMOTE

5- or 1-channel remote control. Pairs directly with drapery motor. Use with Bond Bridge Pro or without. Estimated 10-year battery life.

**FOR ADDITIONAL CONTROL OPTIONS, SEE THE ROADMAP ON THE FOLLOWING PAGES.**

## SPECIFICATIONS

VOLTAGE SHUTTLE	14.8V DC
RECEIVER	Internal
BATTERY	Lithium iOn battery + charger (3-4 months between charges)
MAX POWER	30W
TORQUE	1.0 Nm
TRAVEL SPEED	5.5" per second standard
NOISE LEVEL	< 40 dB(A)
MAXIMUM WEIGHT	55 lbs per motor 40 lbs per motor - curved track
DIMENSIONS	2" x 3" x 12.25"
CERTIFICATIONS/MARKINGS	CE/FCC/DOE
COLOR OPTIONS	White

## FEATURES

TOUCH CONTROL TECHNOLOGY	✓
INTEGRATED EMERGENCY CONTROL	✓
RF COMMUNICATION STANDARD	✓
Z-WAVE COMMUNICATION	-
AUTOMATION SYSTEM COMPATIBLE	✓ using RS485 & dry contacts
WI-FI COMPATIBLE	✓
WORKS WITH DS-XL LED DIMMER	✓
WORKS WITH WIRELESS CONNECTOR	✓
CAN BE USED WITH CURVED TRACK	✓
PLUG & PLAY	✓
WARRANTY	10 Years on motor 2 years on battery pack

# FOREST MOTOR CONTROLS ROADMAP

## HOW DO YOU WANT TO CONTROL YOUR DRAPERY?



Wall Switch, Diamond Remote,  
Easy Touch Remote,  
and Sidekick Gen 3

RF

- ✓ Shuttle
  - ✓ S ✓ M ✓ iOn
- ✓ Wall Switch
- ✓ Diamond Sense Remote
- ✓ Easy Touch Remote
- ✓ Sidekick Gen 3



Voice and App Control  
local and remote

With feedback

WiFi

Connect using Forest WiFi Dongle



Integrations

works with



works with



works with



works with



Integrations  
when cloud services are present



- ✓ Shuttle
  - ✓ S ✓ M ☐ iOn
- ✓ Wall Switch
- ✓ Diamond Sense Remote
- ✓ Easy Touch Remote
- ✓ WiFi Dongle

Without feedback

RF

Connect using Bond Bridge Pro



Integrations

somfy

works with



works with



works with



Control4



SAVANT

ELAN



JOSH



and others

- ✓ Shuttle
  - ✓ S ✓ M ✓ iOn
- ✓ Wall Switch
- ✓ Diamond Sense Remote
- ✓ Easy Touch Remote
- ✓ Bond Bridge Pro
- ✓ Sidekick Gen 3

# FOREST MOTOR CONTROLS ROADMAP



## Wired Building Automation System

we advise you work with an installation specialist

With feedback

RS485

Integrations

Control4

CRESTRON

SAVANT

RTI

and others

- ☒ Shuttle
  - ☒ S ☒ M ☐ iOn
- ☒ Wall Switch
- ☒ Diamond Sense Remote
- ☒ Easy Touch Remote
- ☒ RS485 Port

Without feedback

Dry Contact

Integrations

Control4

CRESTRON

SAVANT

LUTRON

and others

- ☒ Shuttle
  - ☒ S ☒ M ☒ iOn
- ☒ Wall Switch
- ☒ Diamond Sense Remote
- ☒ Easy Touch Remote
- ☐ RS485 Port